


FO systemet skal loges
 ov rør, ikke slanger.

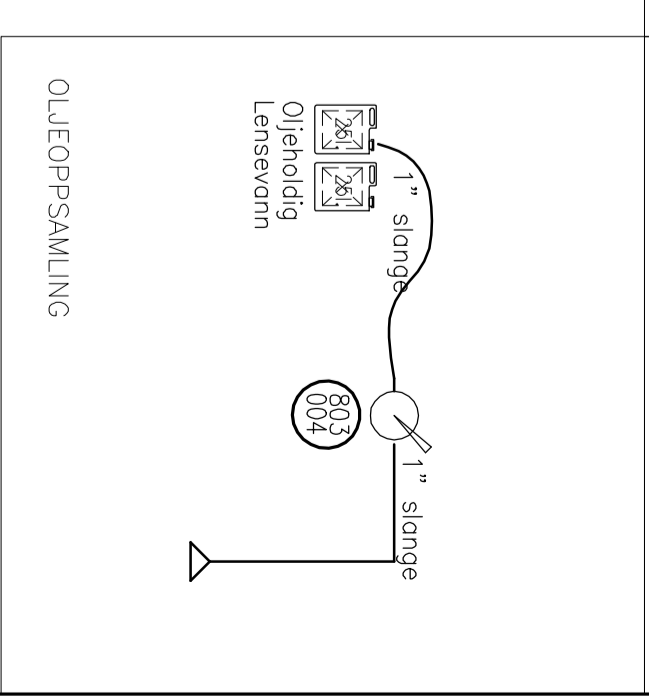


Regelverk for yrkesbåter under 15m.
 Y6.3 : En pumpe i hvert vantett rom.
 Kapasitet 80 l/min
 Dette gir ca 5 m³/h. pr pumpe.
 Passe rørdimensjon : DN32. (max. 2,0 m/sek)

ITEM	DESCRIPTION	TYPE	CAPACITY	DELIVERY DATE
803.006	Blige Pump	Centrifugal	5,6m ³ /h-0,4 BAR	-
803.005	Blige Pump	Centrifugal	5,6m ³ /h-0,4 BAR	-
803.004	Blige Pump Reserve	Handpump	0,7l/cyklus	-
803.003	Blige Pump - Oily water	Handpump	0,7l/cyklus	-
803.002	Blige Pump	Centrifugal	5,6m ³ /h-0,4 BAR	-
803.001	Blige Pump	Centrifugal	5,6m ³ /h-0,4 BAR	-

REV	DESCRIPTION	SIGN/DATE

TITLE		DRAWN	DATE
Maskineri og Utrusting - B.No.5		Maki	15.09.2016
PROJECT		CHECKED	DATE
1064 - Martec		ABd	15.09.2016
SCALE		FORMAT	
1:25		A2	
SHEET		REV	
1 OF 1			
DRAWING NUMBER			
16044-600-05			



GLESVÆR SHIP DESIGN AS
 MARINE ARCHITECTS AND MARINE ENGINEERS
 GJERTRØDVEIEN 1 D, 5353 STRAUME, NORWAY
 TEL.: +47 489 97 626 / +47 926 63 281
 EMAIL: office@gdesign.no
 WEB: www.gdesign.no

Glesvær Ship Design