

SB PROFILE


EXTERNAL DOORS											
POS. No.	DOOR STDRD.	HEIGHT ABV. ST. DECK	OPENING		DOOR			COAMING		LOCATION	REMARKS
			CLEAR	OPENING	MATERIAL	WEATHER	SPRAY T	MATR.	WELDED		
<b>BRIDGE DECK</b>											
3	NS 6090	820	680x1680	ALU	X		ALU	X		BRIDGE DECK TO WHEELHOUSE	6 CLEATS
<b>MAIN DECK</b>											
1	NS 6090	600	680x1480	ALU	X		ALU	X		MAIN DECK TO ENGINE ROOM	6 CLEATS
2	NS 6090	600	680x1680	ALU	X		ALU	X		MAIN DECK TO ACCOMMODATION	6 CLEATS

HATCHES ON DECK											
POS. No.	DECK REF.	LOCATION	TO ACCOM	HEIGHT AB. DECK	COAMING MATERIAL	COAMING THICKN.	COVER MATERIAL	COVER THICKN.	GASKET	NO. CLEATS	REMARKS
1	BRIDGE DECK	FOREPEAK		600	ALU	7	ALU	7	RUBBER	1	EM EX
3	MAIN DECK	CARGO HOLD		600	ALU	7	ALU	7	RUBBER	8	CLOSED AT SEA
4	MAIN DECK	CARGO HOLD		600	ALU	7	ALU	7	RUBBER	1	



WINDOWS										
POS. No.	STANDARD	LOCATION	NOMINAL SIZE W x H	EXECUTION		COAMING		GLASS		REMARKS
				WELDED	DEADLIGHT	MATERIAL	TYPE	GLASS THICKNESS	GLASS TYPE	
<b>MAIN DECK</b>										
1	ISO 1751	WHEELHOUSE	480x690	X		ALU	A	12	HARDENED	
2	ISO 1751	WHEELHOUSE	480x690	X		ALU	A	12	HARDENED	LOWERING
3	ISO 1751	WHEELHOUSE	480x470x762	X		ALU	A	12	HARDENED	RIGHT
4	ISO 1751	WHEELHOUSE	480x470x762	X		ALU	A	12	HARDENED	LEFT
5	ISO 1751	WHEELHOUSE	480x690	X		ALU	A	12	HARDENED	ROTATING
6	ISO 1751	ACCOM.	Ø350	X	X	ALU	A	12	HARDENED	

VENTILATORS										
POS. No.	AREA SERVED	DECK	SIDE	HEIGHT	SIZE	OPENING	DIMENSION	CLOSING		REMARKS
								APPLIANCE	MANUAL CLOSING	
1	ENGINE ROOM	BRIDGE DECK	PS	800mm	Ø300			WEATHERTIGHT	MANUAL CLOSING	
2	ACCOMMODATION	BRIDGE DECK	PS	800mm	300x300			WEATHERTIGHT	MANUAL CLOSING	
3	STORES EQUIPMENT ROOM	BRIDGE DECK	SB	800mm	Ø80			GOOSE NECK		
4	LAUNDRY	BRIDGE DECK	PS	800mm	Ø150			WEATHERTIGHT	MANUAL CLOSING	
5	GALLEY	BRIDGE DECK	PS	800mm	Ø150			WEATHERTIGHT	MANUAL CLOSING	

VENT PIPE SYSTEM										
Pos Nr.	MATR.	PIPE CONNECTION		Dim on open deck	ARR.TOP	H/ABOVE DECK	REMARKS			
		FROM	TO							
1	ALU	Ferskvannstank	Bridge Deck	DN40 x 3,5	Goose neck	760				
2	ALU	BR. Oljetank SB	Main Deck	DN50 x 3,5	Vent Valve	1000				
3	ALU	BR. Oljetank BB	Main Deck	DN50 x 3,5	Vent Valve	1000				
4	ALU	Septic	Bridge Deck	DN40 x 3,5	Goose neck	3500				
5	ALU	Welldeck	Main Deck	DN40 x 3,5	Vent Valve	1100				

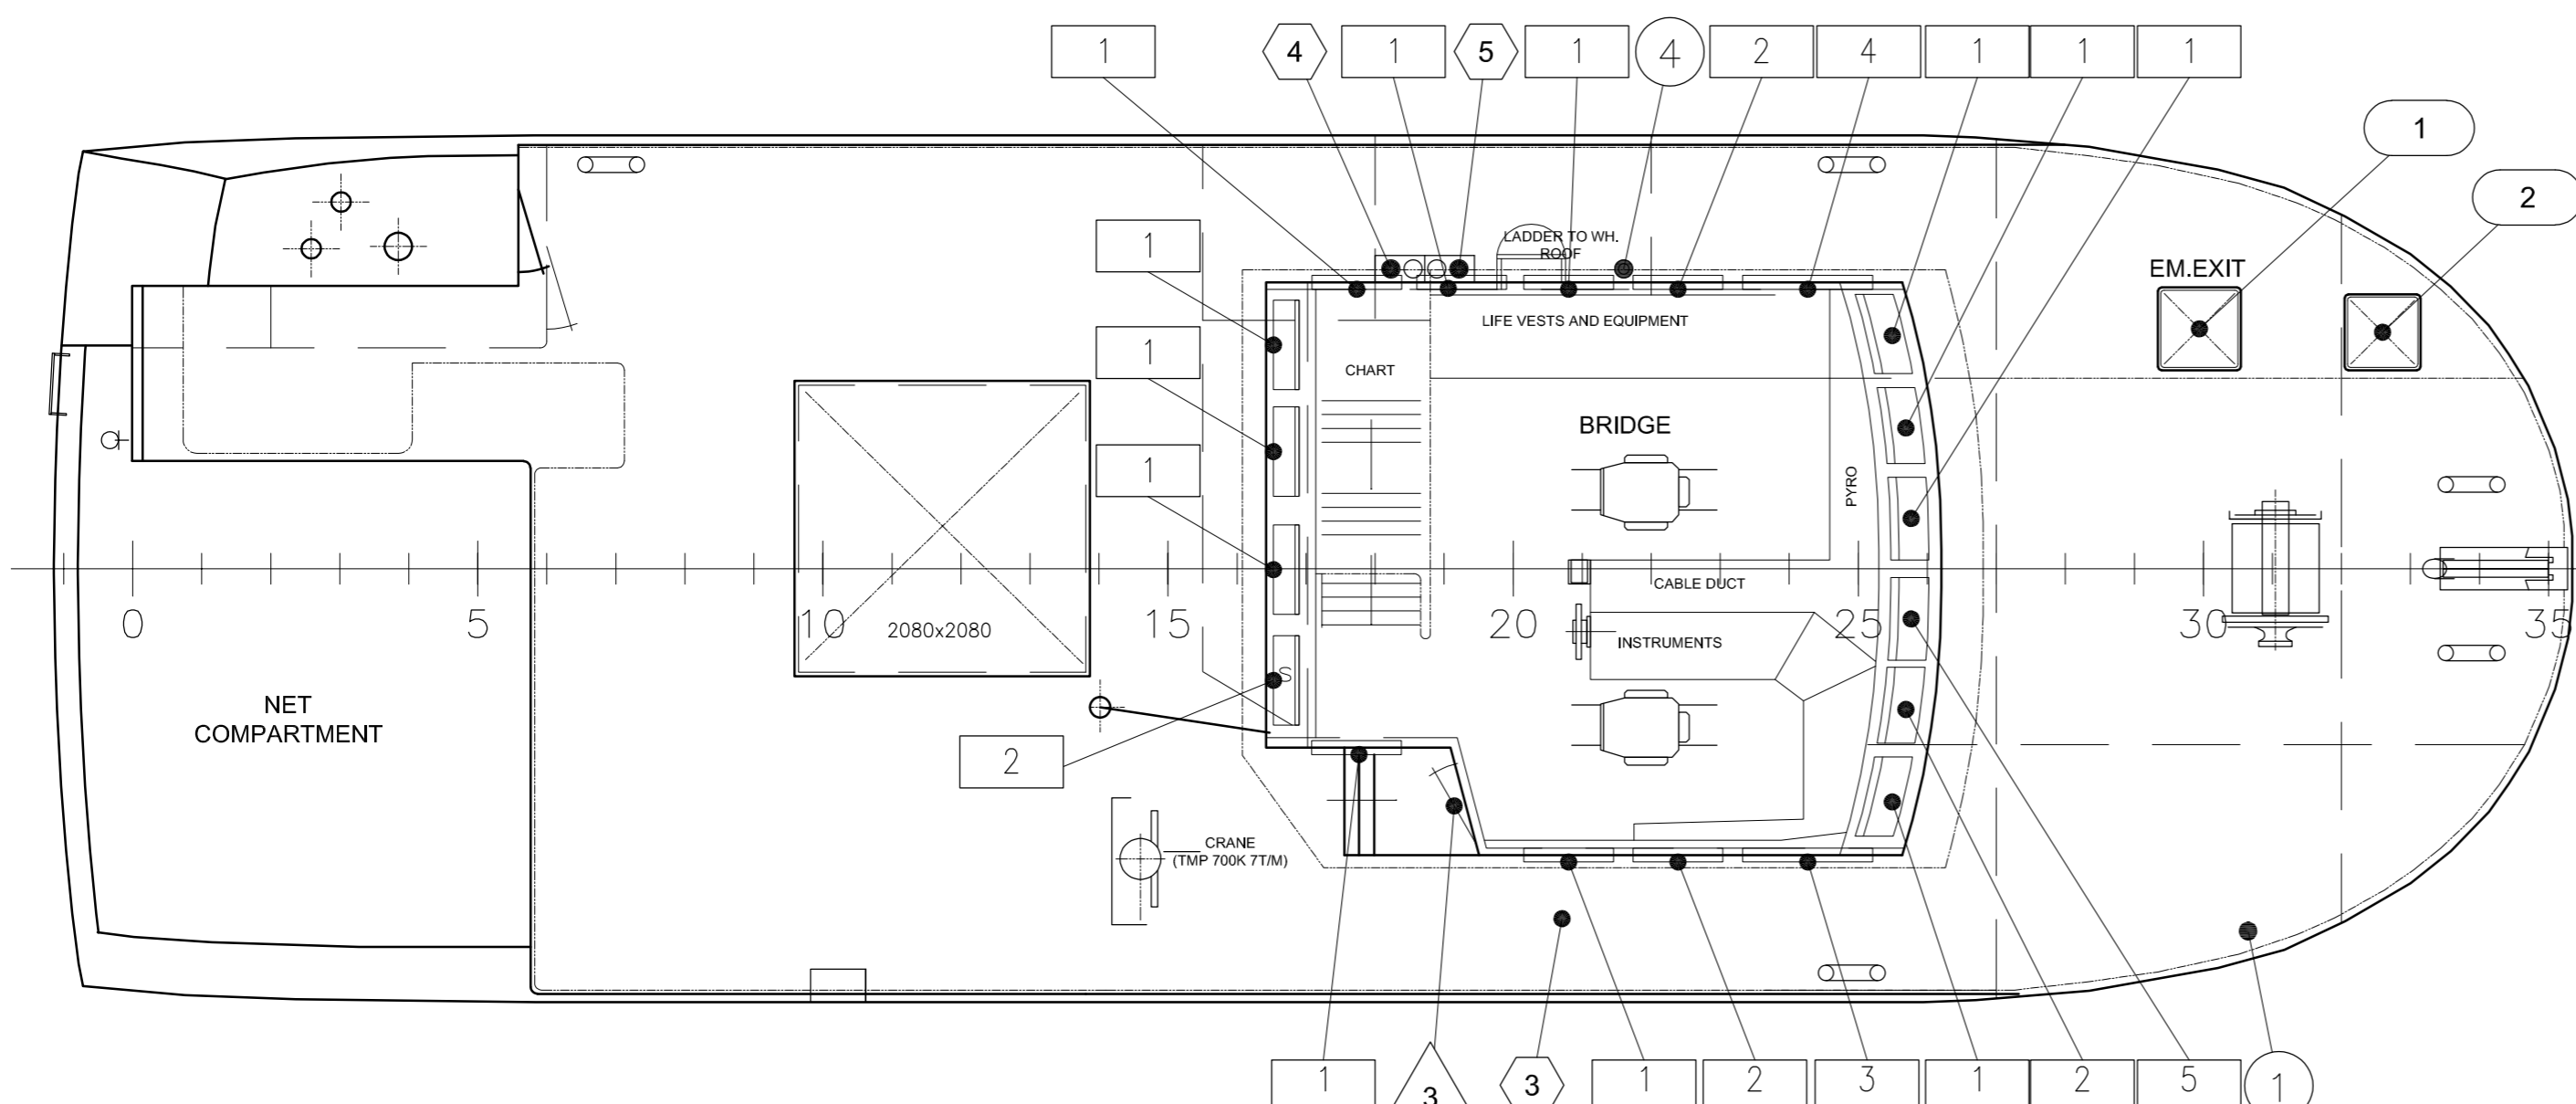

BOAT DECK/BRIDGE  
6190

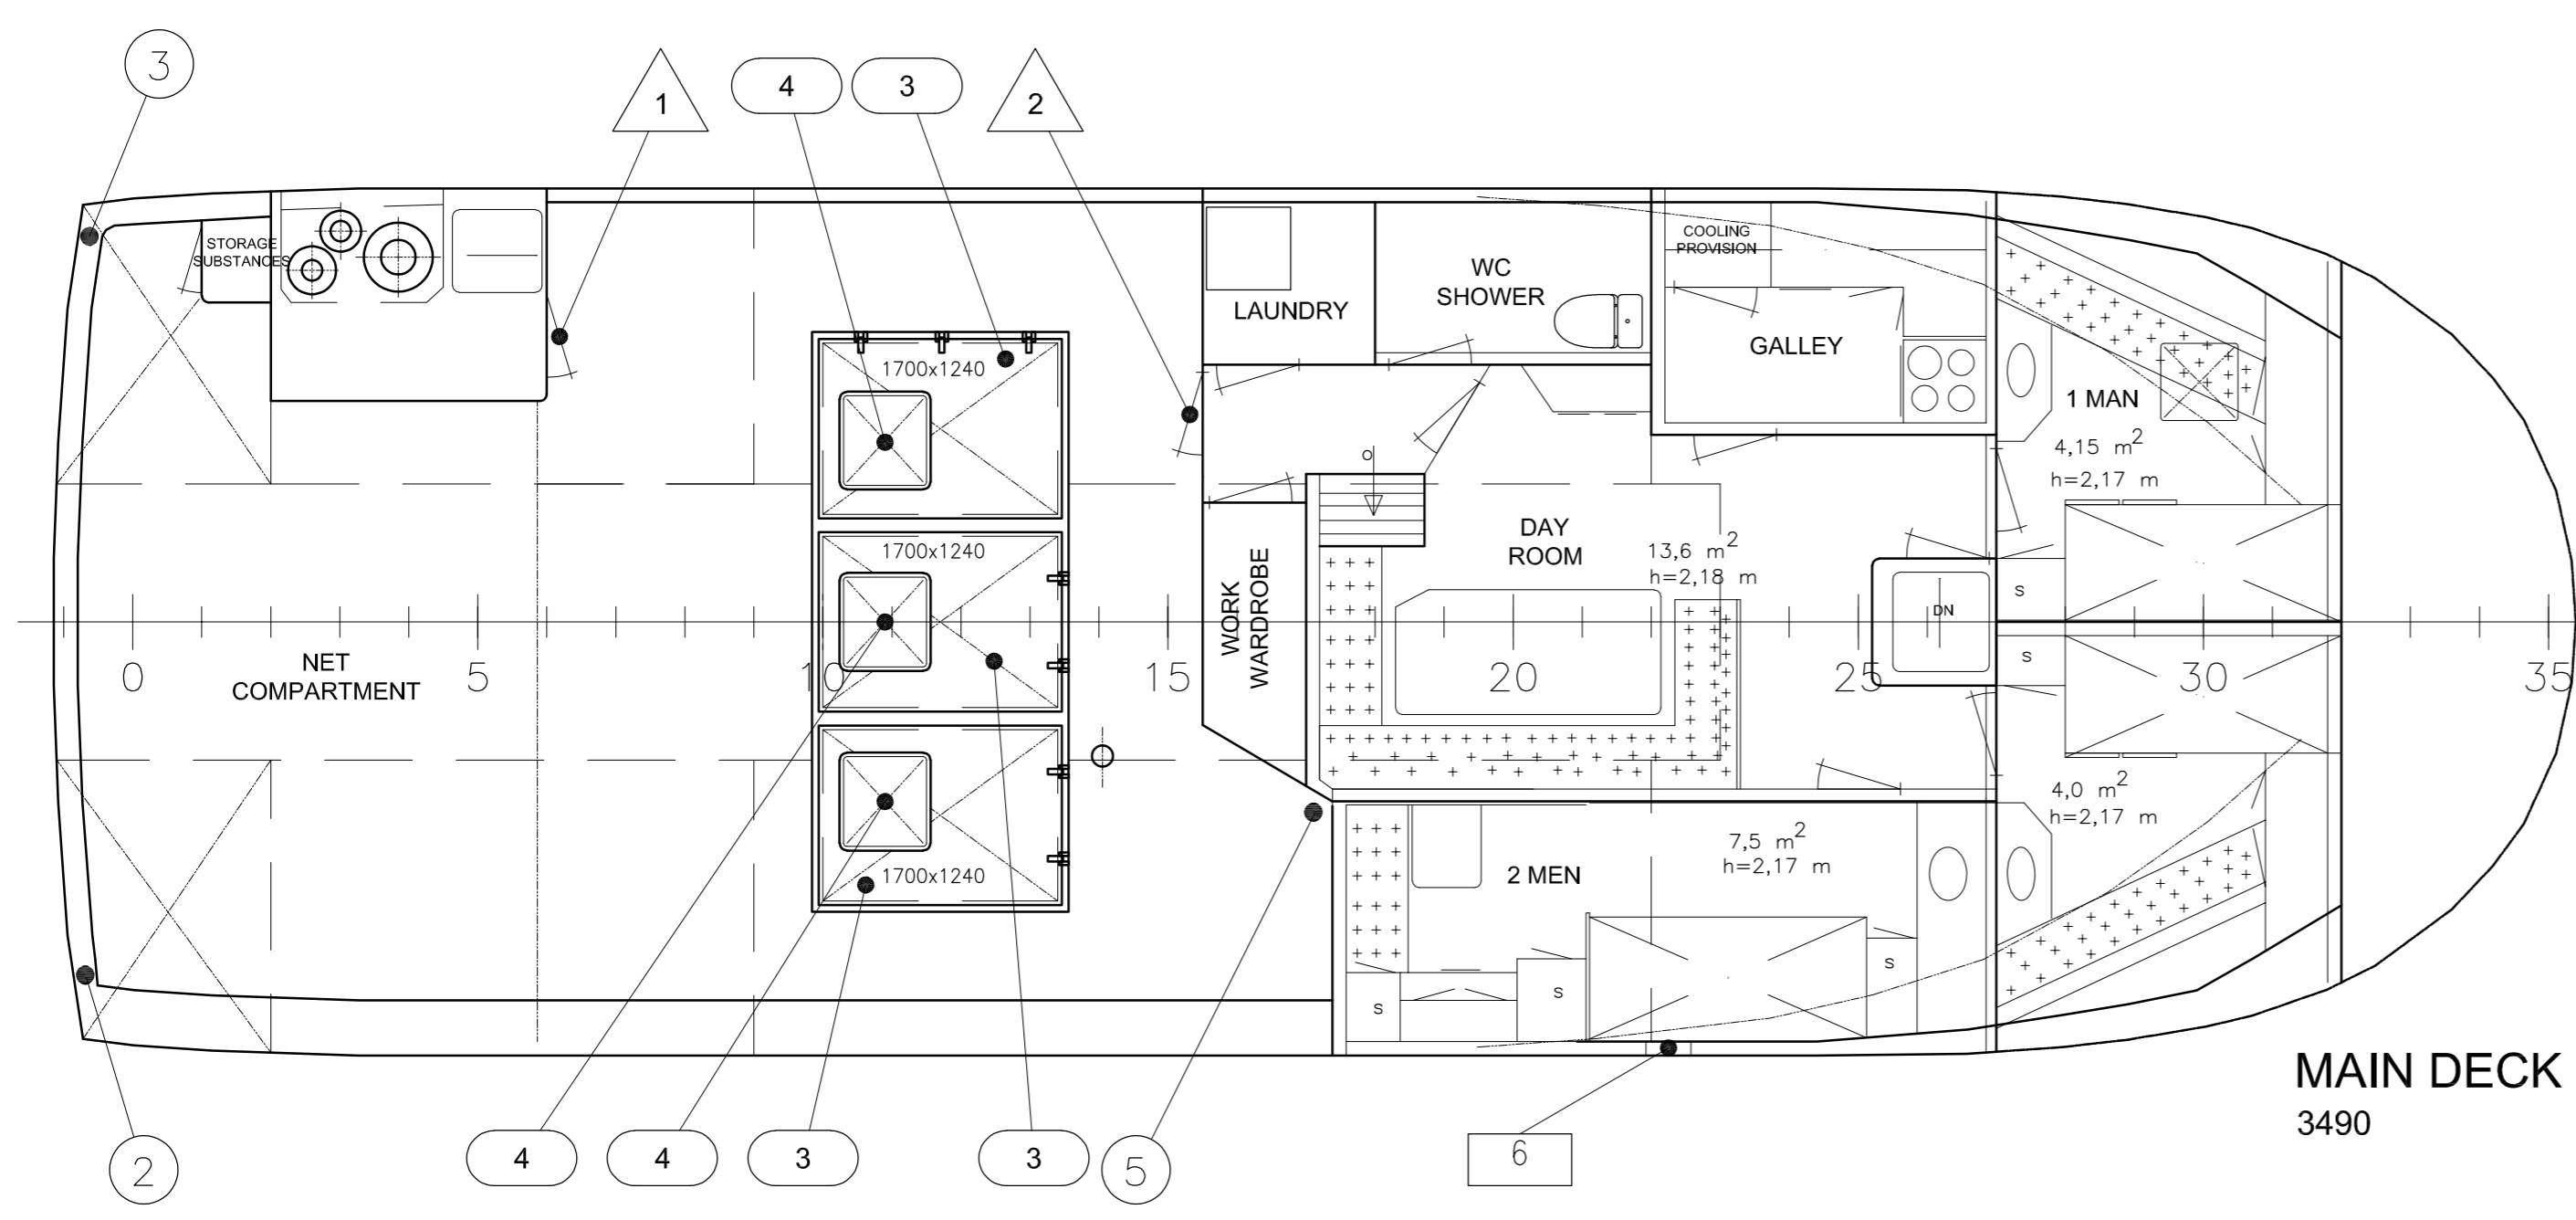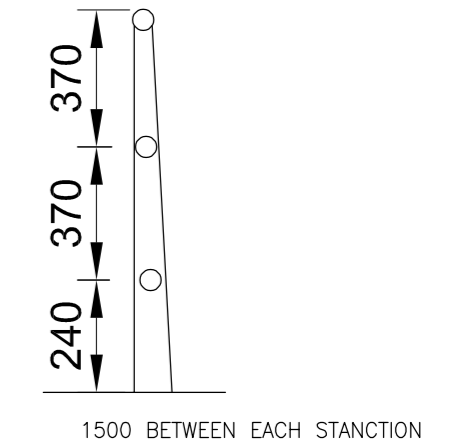

MAIN DECK  
3490

**MAIN PARTICULARS**

LENGTH OVER ALL (LOA)	:	18,25 m
LENGTH BETWEEN P.P. (LPP)	:	16,55 m
BREADTH MLD	:	6,28 m
DEPTH TO MAIN DECK	:	3,49 m
SOMMER DYPGÅENDE	:	3,37 m

**CAPACITIES**

CARGO HOLD	:	84 m3
FUEL OIL	:	10,2 m3
FRESH WATER	:	3 m3
GROSS TONNAGE	:	>100 GT

ALL RIGHTS RESERVED!

This drawing is the property of Møre Maritime AS. It may not be copied or forwarded to any third party without our written consent. The receipt of this drawing implies that the above conditions are accepted.

REV. A	Changed after conversion 2020	21.01.21	VJ	-	-	-
REV. ALTERATIONS	DATE	SIGN.	REV. ALTERATIONS	DATE	SIGN.	
YARD NO/NAME	YARD No. 20, BÅT OG MOTORSERVICE			BLOCK	CLIENT (NAME/LOGO)	
FREEBOARD PLAN				KENFISH 2 AS		
MS HERMON, LLGQ				FLATSET 6530 AVERBY		
DATE	MM PRO. AM123	MM DWG. NO.	SCALE	YARD DWG. NO.		
DATE	Dec 20	AM123-101-016	1:50			
DES.	VJ	CHK.	FILE	AM123-101-016.dwg	REV.	SFI
Dalegaten 137				A	101	
N-6518 Kristiansund, Norway				SHEET 1/1		
Tel.: +47 71 58 30 00				FORMAT		
E-mail: post@moremaritime.com				TO REPLACE 18.890.00		
REV. APPROVED BY				REPLACED BY		
				INFO		